



Husqvarna®

MANAGE DUST WITH CONFIDENCE



NEW DUST EXTRACTORS FROM HUSQVARNA

FOR A BETTER WAY OF WORKING



INTRODUCING

NEW LINE OF VERSATILE HEPA DUST EXTRACTORS



On any construction job, dust is the enemy. It can harm machine operators. It can cause problems with equipment. And it can have a negative effect on working efficiency. After years of development, we're proud to introduce our new range of dust extractors.

Whether you're grinding, cutting, drilling, vacuum cleaning or doing other work, make them part of your system and your working day and enjoy more confidence, higher productivity and a healthier working environment.

TWO BATTERY AND THREE CORDDED MODELS



DE 120

DE 110 S

DE 110



DE 110i 

DE 120i PACE 


VERSATILE AND COMPACT DUST EXTRACTORS FOR MULTIPLE APPLICATIONS.

The jobs you perform and the sites you visit come in all types..
With a Husqvarna dust extractor close at hand, you can breathe cleaner air – wherever your work takes you.






Power cutters



Drilling equipment



Floor tools



Angle grinders



Surface Preparation

- Floor grinding
- Shot-blasting
- Scarifying
- Scraping



And many more

- Soff-cut®
- Floor sawing
- Handheld power tools



SAFETY

MEET THE WORKMATE THAT REDUCES RISK

It's a fact – construction work creates dust and dust creates risk. Wouldn't it be great knowing you had a machine working beside you that helped reduce this risk?



HIGH STANDARDS

All five models in this new range of compact dust extractors comply with the latest HEPA standards for heavy-duty dust extractor usage. They are also equipped with EN1822 certified HEPA H13-filters.



HEPA FILTER

All models are equipped with HEPA H13-filters with EN1822 certification, including a cap for safe and efficient replacement.



HEPA FILTER PLACEMENT

The HEPA filters are located separately from the pre-filter while the opening mechanism requires an Allen wrench, which prevents accidental opening.



HEPA FILTER MONITORING

This feature eliminates the risk of starting the machine without a HEPA filter in place. It also checks filter status during operation.



AIRFLOW WARNING

An integrated filter alarm with adjustable hose diameter indicates when filter maintenance is required.



IMPROVED LONGOPAC® ATTACHMENT SYSTEM

A newly developed, easy-to-use, Longopac® bag cassette attachment system and a V-shaped tray ensure easy mounting and safer handling. Also, the special pleat-cover ensures no dust gathers in the folds.





Husqvarna
DE 120



PERFORMANCE

ENGINEERED FOR EXTENDED PERFORMANCE

Our new range of dust extractors has been developed to increase working intervals. In this way, you can focus on the job and be productive for longer while your Husqvarna dust extractor does its job in the background.

CONTINUOUS AND MORE SUSTAINABLE HIGH PERFORMANCE WITH e-FLOW

Optimal airspeed during the whole filter saturation time process allows the entire three-stage filtration process to work at high efficiency levels.

All while reducing energy consumption up to 30%* and reducing sound level up to 8 dB(A)**



EFFORTLESS FILTER CLEANING MECHANISM

A highly efficient filter cleaning mechanism ensures the cleaning process can be done by simply closing the inlet and pressing a button.




* Based on in-house tests conducted in laboratory environment for models DE 110 and DE 120, measuring current at nominal voltage with e-flow activated, without any restrictions in the system. Power is calculated from the current/voltage and compared with the power consumption at full flow, also without restrictions.

** Based on in-house test (report C20-SE128) conducted for models DE 110 and DE 120 in a laboratory environment, using the dust extractors without any restrictions in the system, measuring the noise level with and without e-flow activated.



HMI

This feature delivers early and on-site troubleshooting as well as making sure that the operator has the expected level of dust protection.

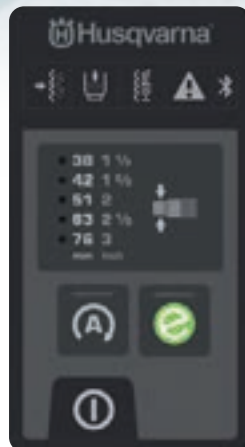

LOW COST OF OWNERSHIP

A cost-efficient dust bag system in combination with long filter lifetime delivers low cost of ownership.



COMPACT & EASY

EASIER OPERATION, TROUBLE-FREE OWNERSHIP

The best machines are easy to operate and easy to own. That's where true confidence is born – and our compact dust extractors deliver this every day.



COMPACT & LIGHT

Thanks to their compact size and light weight, all five models are easy to transport. The DE 110 weighs only 55 lbs (25 kg).

EASY TO MOVE

Carry it like a trolley on two wheels or push it with all four. Either way, maneuvering is smooth.

SMART DETAILS AND ACCESSORIES

Increase efficiency with smart details such as lifting hooks and features that allow for the attachment of the hoses, cables, wands and floor tools to the machine. There is also a dust cap for the (anti-static*) hoses and a hose bag* that helps reduce exposure to dust leading to a safer work environment.



* Optional accessories



FLAT TOP DESIGN

The top of the machine is flat and acts as extra storage space during transportation.

EASY TO CONNECT

Connect the hose with one hand and detach easily by simply pressing a button.

INTEGRATED INLET CAP

The hose inlet has an integrated cap that seals the inlet during transportation, filter cleaning or while changing the dust bag.

LOCKABLE WHEELS

Wheel locks keep the machine fixed during operation or transport.





CORDLESS CONVENIENCE

Husqvarna Construction is committed to charging the future with battery products for every light construction application. Our new dust extractor range includes two battery-driven models that offer the same features as corded models and the extra convenience of cordless operation. As well as making them quick to set up and start using, no power grid connection is required, optimising working time and versatility.

PACE BATTERIES AND CHARGERS



B380X / B750X

The sturdy design of the Husqvarna PACE Battery System enables usage in tough, heavy-duty conditions, indoors and outdoors. It is available in two battery sizes, both of which deliver high power and fast charging – and a job well done.



CHARGER C900X/C1800X

Our high-power battery chargers have a capacity of 1800 W and are suitable for B380X and B750X PACE batteries. They also feature a fast-charging mode and active cooling.

PACE – CHARGING TIME FOR DIFFERENT BATTERIES AND CHARGERS

BATTERY	C900X CHARGING LEVEL	C1800X CHARGING LEVEL	NOMINAL VOLTAGE, V	ENERGY, Wh	WEIGHT, lbs (kg)
	100%	100%			
B380X	45 min	45 min	94	375	6.6 (3)
B750X	75 min	45 min	94	750	11 (5)



TWO OPTIMIZED BATTERY ECO-SYSTEMS

The cordless models feature two different battery eco-systems, both of which can be used to power a constantly increasing range of Husqvarna products. Furthermore, both battery-driven dust extractors give you the flexibility to use with many battery power tools.



DE 120 PACE

BATTERY SYSTEM: PACE



DE 110i

BATTERY SYSTEM: BLi

BATTERY RUNTIME:

BLi300: up to 39 minutes

BLi200: up to 22 minutes



i-SERIES BATTERIES AND CHARGERS

HUSQVARNA BLi200 / BLi300

These batteries offer excellent runtime, high capacity to weight ratio a 4-LED charge level indicator, all-weather operation and excellent cooling characteristics. They can also be recharged more than 1500 times.



Capacity: 2.6 / 5.2 / 9.4 Ah
Weight: 1.76 (0.8) / 2.87 (1.3) / 4.19 (1.9)
lbs (kg)



HUSQVARNA QC500

This charger recharges BLi300 50% faster than the QC330 charger. It features active battery cooling for minimum charge time and longer battery life, plus 2-LED status indicator and high-power output.



HUSQVARNA QC330

Quick charging unit with 2-LED status indicator and active battery cooling for minimum charge time and longer battery life.



HUSQVARNA QC80F FIELD CHARGER

For charging in 12V car / truck outlet when onsite or on the road.



HUSQVARNA VI 600F INVERTER

Enables charging in the field by converting 12V DC from any lead acid battery to 220V AC for your QC500, QC330 or QC80F quick chargers.

i-SERIES – CHARGING TIME FOR DIFFERENT BATTERIES AND CHARGERS

BATTERY	QC500 CHARGING LEVEL		QC330 CHARGING LEVEL		QC80F CHARGING LEVEL	
	80%	100%	80%	100%	80%	100%
BLi200	30 min	50 min	30 min	50 min	2 h 25 min	2 h 40 min
BLi300	35 min	1 h	55 min	1 h 20 min	4 h	4 h 20 min


EASY TO MAINTAIN & SERVICE

SAFER TO CLEAN

The high water protection standard allows for easy cleaning of the machine.

Water and dust protection standards

- IP values up to IP 55.
- IP values on battery models up to IPX4.

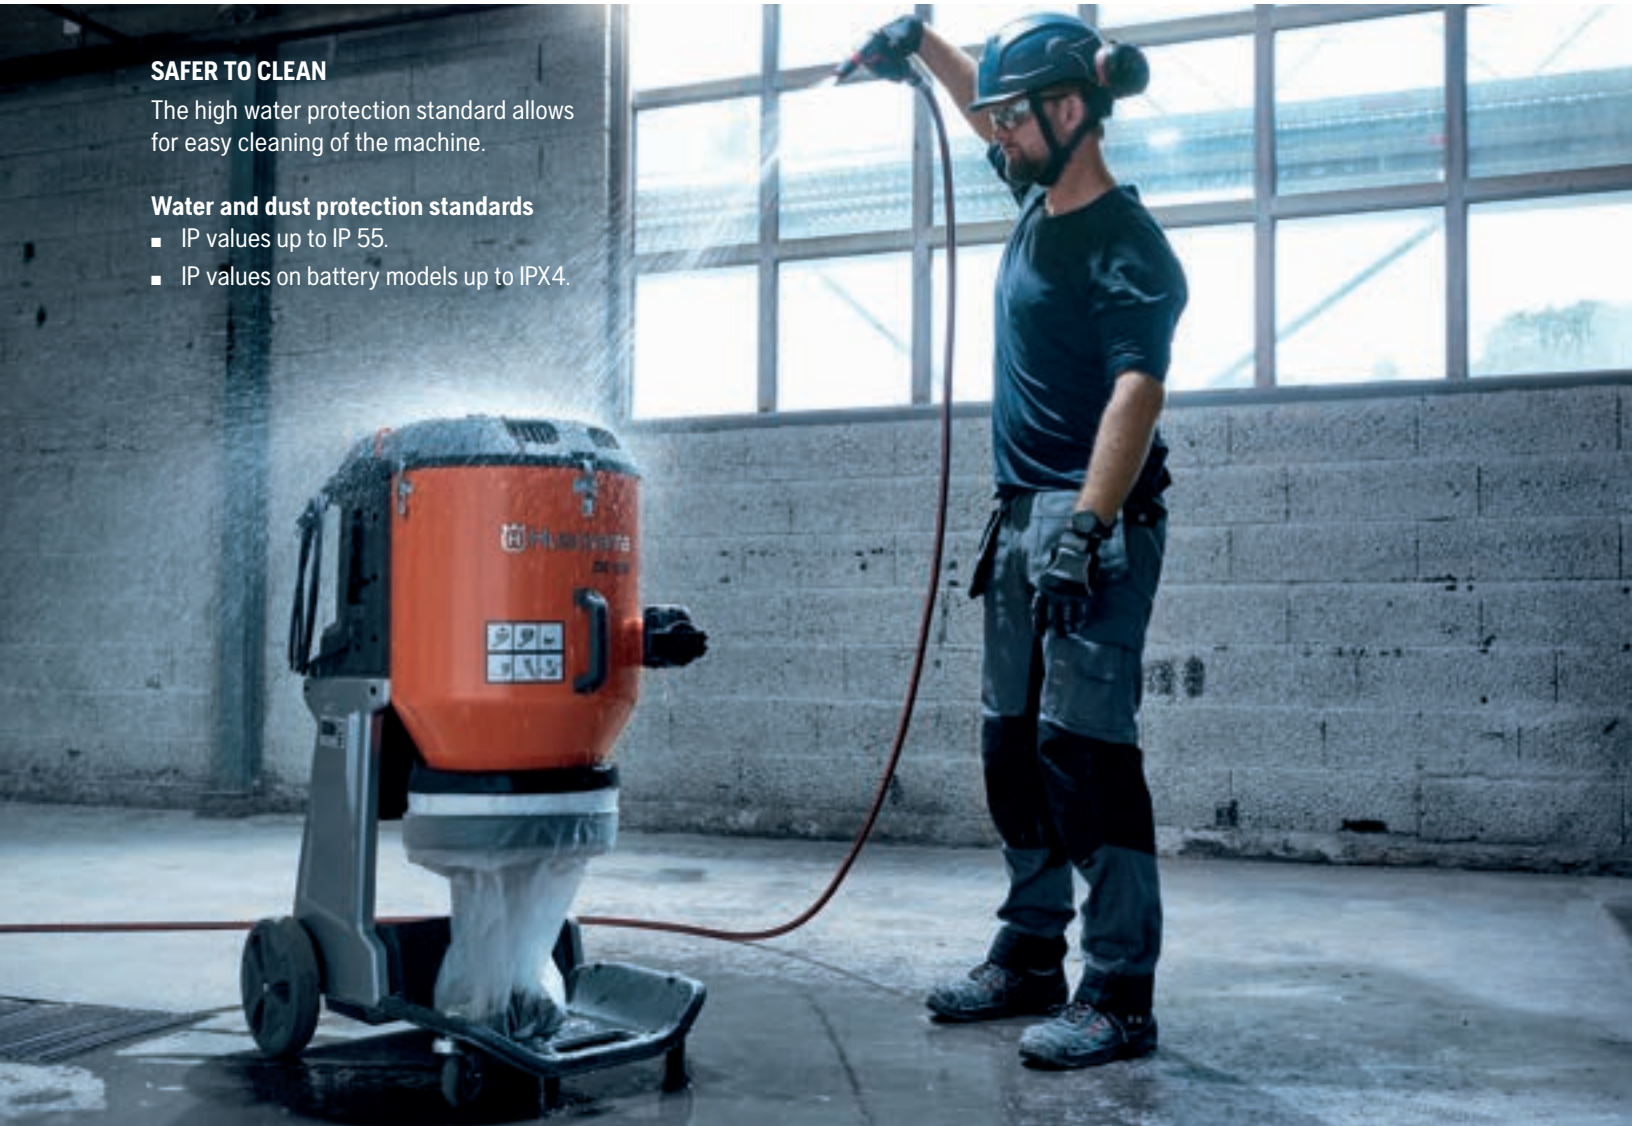

LONG-LASTING POLYESTER FILTER

The pre-filter is made of polyester, which has durable properties. It resists moisture more effectively, can be washed to avoid airborne dust and delivers a longer service life longer than paper filters.

NEW DUST BAG ATTACHMENT SYSTEM

1





More sturdy design
– no more flap.

2

Easy to fasten – just click
it on. No belt needed to
secure dust bag.

3

Pleat protection ensures that no dust gets in the folds of the dust bag, and minimizes risk for dust exposure when changing bag.

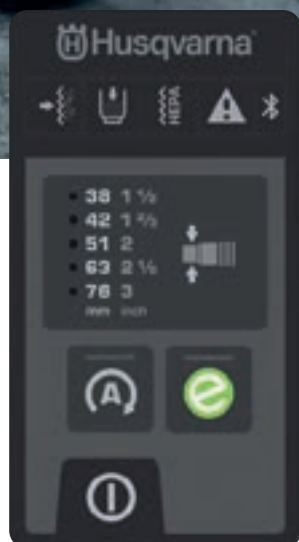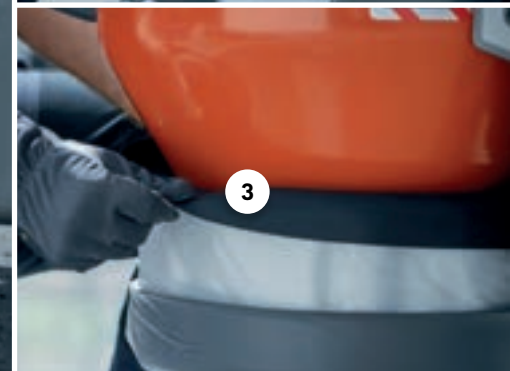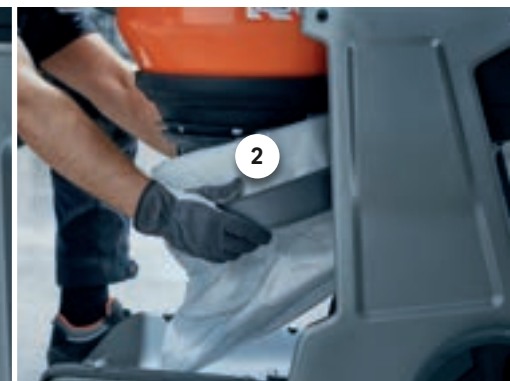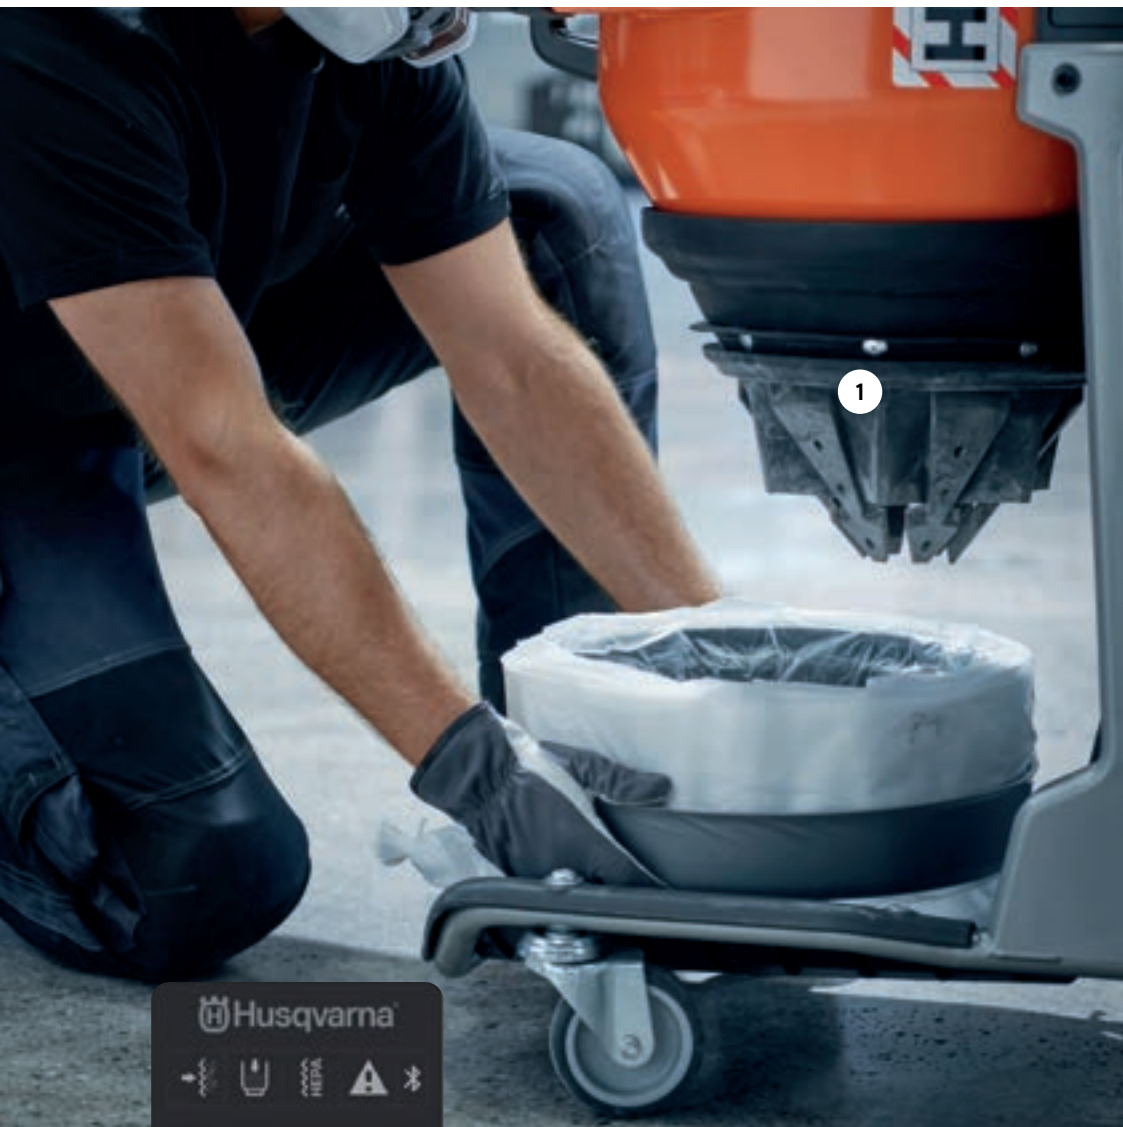

HMI

The HMI provides warnings on operational maintenance for early and on-site troubleshooting.



AUTOSTART

The Autostart function enables start-up of the dust extractor by activating the power tool connected to the auxiliary outlet. Selected models only.



CONNECTIVITY & FLEET SERVICES

STAY IN CONTROL WITH HUSQVARNA FLEET SERVICES™



GEO-LOCATION INFO

As soon as a machine or battery is within wireless connection distance from the Husqvarna Fleet Services™ Gateway or app, its location is registered. So, if you are trying to locate a machine, simply check the map to see if it is in storage, away for service or out on a job site.




SERVICE HISTORY AND NOTIFICATIONS

Tracks run hours and offers the convenience of setting your own maintenance alarms.

PREDICTIVE FILTER MAINTENANCE

Predictive maintenance in fleet services app enables you to pro-actively plan when a HEPA filter change is needed.

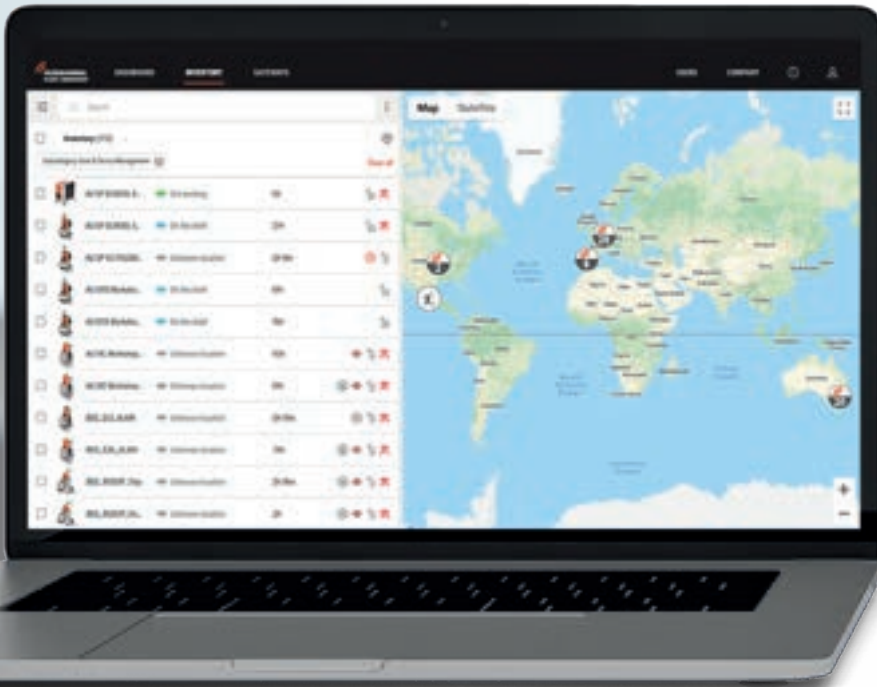

WIRELESS UPDATES

Convenient wireless machine firmware updates ensure that your machine is equipped with the latest system software.

OPERATION LOG

See operation log in Fleet Service app.

ACCESSORIES

ACCESORIES FOR OPTIMAL PERFORMANCE

Add a quality Husqvarna accessory and take your dust extractor to new levels of performance.



HOSE BAGS FOR EASY TRANSPORTATION

Use this practical hose bag to store hoses during transport and keep all your accessories stored in one place. Available in two sizes.



DUST CAPS

These dust caps cover the adapters, preventing dust falling out of the hose during transport. An effective accessory that delivers easier, dust-free transportation of the hose.



MULTI ADAPTER

A handy multi-adapter enables the connection of the dust extractor to a power tool in several possible diameters. Available for both 1.5 in (38 mm) and 2 in (51 mm) hoses.



NEW FLOOR TOOL

This coarse dust floor tool is specially designed for the use in construction. A 1.1 in (28 mm) inlet means even larger pieces of debris can be collected. Available in 14.5 in (370 mm) or 18 in (450 mm) widths depending on model.



NEW WAND SYSTEM

New strong wand design in 1.5 in (38 mm) or 2 in (51 mm), depending on the model. Two pieces design connects easily thanks to the handy click-system.



LONGOPAC® BAG CASSETTE

Standard use of the Longopac® cassette system ensures the system stays completely closed, even during bag changes.




ANTISTATIC HOSES

We offer a complete range of anti-static hoses and adapters.





 **Husqvarna**
HOSE BAG
70L

Husqvarna
DE 120 PACE

TECHNICAL DATA



DE 110 S

INCLUDED IN MACHINE

- 16.4 ft (5 m) Hose with adapters
- 1.5" (38 mm) Wand
- 14.6" (370 mm) Floor tool with rubber strips
- 1.5" (38 mm) Multi-adapter
- Dust cap



DE 110

INCLUDED IN MACHINE

- 16.4 ft (5 m) Hose with adapters
- 1.5" (38 mm) Wand
- 14.6" (370 mm) Floor tool with rubber strips
- 1.5" (38 mm) Multi-adapter
- Dust cap



TECHNICAL SPECIFICATIONS

	DE 110 S	DE 110
Model name	DE 110 S	DE 110
Part number	970509604	970509404
Phases	1-ph 50-60 Hz	1-ph 50-60 Hz
Max power	900 W	1100 W
Rated voltage	120 V	120 V
Rated current:	7.5 A	9.5 A
Weight	55 lbs (25 kg)	55 lbs (25 kg)
Max air flow at turbine	127 cfm (215 m ³ /h)	141 cfm (240 m ³ /h)
Max air flow at extractor	106 cfm (180 m ³ /h)	124 cfm (210 m ³ /h)
Max vacuum at turbine	2.9 psi (20 kPa)	2.9 psi (20 kPa)
Auxiliary outlet	—	—
Max load auxiliary outlet	—	10 A
Dust extraction hose diameter	1.5" (38 mm)	1.5" (38 mm)
User interface	On / off	HMI
Pre-filter area	15.4 ft ² (1.4 m ²)	15.4 ft ² (1.4 m ²)
Total HEPA area	12.7 ft ² (1.2 m ²)	12.7 ft ² (1.2 m ²)
Protection class	IP54	IP54



DE 120

INCLUDED IN MACHINE

- 24.6 ft (7.5 m) Hose with adapters
- 2" (51 mm) Wand
- 17.7" (450 mm) Floor tool with rubber strips
- Dust cap



DE 110i

INCLUDED IN MACHINE

- 16.4 ft (5 m) Hose with adapters
- 1.5" (38 mm) Wand
- 14.6" (370 mm) Floor tool with rubber strips
- 1.5" (38 mm) Multi-adapter
- Dust cap



DE 120 PACE

COMING
SOON!



PACE

DE 120

970514804

1-ph 50-60 Hz

2200 W

120 V / 230 V

19 A / 10 A

86 lbs (39 kg)

283 cfm (480 m³/h)

241 cfm (410 m³/h)

2.9 psi (20 kPa)

—

—

2" (51 mm)

HMI

29.5 ft² (2.7 m²)

25.4 ft² (2.4 m²)

IP55

DE 110i

970514901

—

900 W

36 V

—

57 lbs (26 kg)*

127 cfm (215 m³/h)

106 cfm (180 m³/h)

2.6 psi (18 kPa)

—

—

1.5" (38 mm)

HMI

15.4 ft² (1.4 m²)

12.7 ft² (1.2 m²)

IPX4

*Excl. batteries



 **Husqvarna**[®]

husqvarnacp.com