




CHEMSAFE[™]
BRANDS

Chemsafe[™] SOLVEX 500W

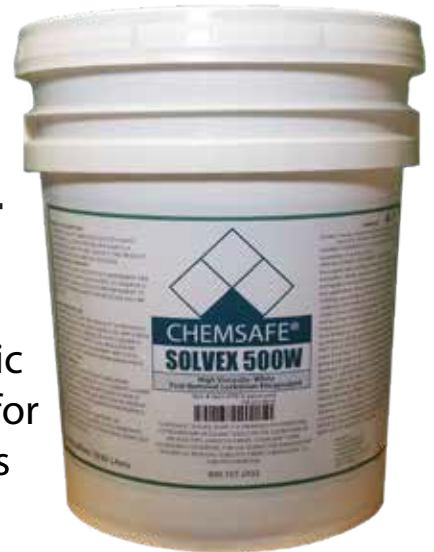

HIGH VISCOSITY-WHITE POST-REMOVAL LOCKDOWN ENCAPSULANT

Chemsafe[™] Solvex 500 White is a premixed post removal lockdown encapsulant used for the lockdown of microscopic asbestos fibers. Chemsafe[®] 500 white lockdown is essential for use during the mandatory sealing of residual asbestos fibers subsequent to asbestos removal.

Directions For Use:

For best results, mix this product thoroughly (5-10 minutes) before and during use. Apply with an airless sprayer. Dispose of in accordance with federal, state and local regulations.

Clean-Up: Clean spray equipment and tools immediately after use with warm water prior to product drying.

PRODUCT DATA

Item	Description
2663-0778	Chemsafe [™] Solvex 500 White 5 Gallon Pail (ea)
2665-0770	Chemsafe [™] Solvex 500 White 275 Gallon Tote

General ID	Lockdown
Odor	Negligible
Color	White
Flash Point	N/A
Vapor Density	1
Solubility in Water	100%
Specific Gravity (water=1)	1.06

Boiling Range	212° F.
Coverage	300-500 Sq Ft per gal
Clean Up	Soap & Water
Reactivity	Stable
Application	Brush/Roller/Airless
Shelf Life	2 Years Unopened
V.O.C. Content	11.36 g/L
Shipping Weight	5 gal. = 47 lbs 55 gal. = 517 lbs
DOT Shipping Name	Not Regulated
DOT Hazard Class	Not Regulated

800-465-3989

safetyexpress.com